



FLASHFORGE®
3D PRINTER

Cad  **Cast**
3D Printing Solutions

WaxJet 400

**Large Size - High Precision
Wax 3D Printer**





FLASHFORGE[®]
3D PRINTER

WaxJet 400 adopts multijet printing technology for printing smooth surface, high precision casting wax pattern. Large print size, and can be tiled and overlapped to place multiple models, the thickness of each layer is 0.016mm. It's suitable for jewelry, clocks instruments, crafts, precision casting and aerospace precision investment casting field.

WaxJet 400 provides:

1. Customized and quick production of small batch orders;
2. Produce styles which traditional craft cannot achieve;
3. Save the cost of plate making and revision, reduce reliance on manual revision;
4. Standardized process and save labor cost;
5. Anti-leak style, release designers creative.

WaxJet 400



Cad Cast Co., Ltd

6/18, Rachadaphisek (Tha Pra - Taksin) Rd.,
Thalat Phlu, Thonburi, Bangkok 10600,
Thailand
Tel: (+66) 02-405-4824 Ext 42
Email: sales@cadcastbkk.com
Line Id: @cadcastbkk

Cad Cast
3D Printing Solutions

Product Specification


Molding Method	MJP
Molding Size	289*218*150mm
Printing Mode	XHD: 1200*1200*1600 DPI: 16μ of each layer
Dimensional Accuracy	±0.04mm / 20mm
Power Supply	AC220-240V, 50Hz, 4KW
Device Size	1352*775*1600mm
N.W.	480kg
G.W.	630kg
Package Size	1530*900*1837mm
Slicing Software	WaxJetPrint
Data Support Format	stl / slc
E-mail Notify	Applicable
Disk Capacity	500G
Network Connection	Network 10/100/1000 ethernet / USB
Guest Operating System	Windows 7 / Windows 10 (64bit)
Operating Environment	18-28°C, 30-70% of humidity

Material Specification

Structural Material	FFWJ1100 N.W.: 3.0 kg/bottle (2 material bins/ each device, auto reloading)
Supporting Material	FFMS3100 N.W.: 3.6 kg/bottle (2 material bins/ each device, auto reloading)

Properties	Condition	FFWJ1100	FFMS3100
Composition		100%wax	Wax support material
Color		Purple	White
Density@95°C(liquid)		0.76g/cm ³	0.85g/cm ³
Melting Point		68°C	55°C
Softening Point		63°C	NA
Volumetric Shrinkage from 40°C to RT	SH/T 0588-1994	1.10%	NA
Linear Shrinkage from 40°C to RT		0.70%	NA
Needle Penetration Hardness	GB/T 4985-2010	g	NA
Ash Content	GB/T 14235.3-1993	<0.01%	NA
Description		High resolution, durable casting wax	Hands-free dissolvable wax

Output (pcs/day)

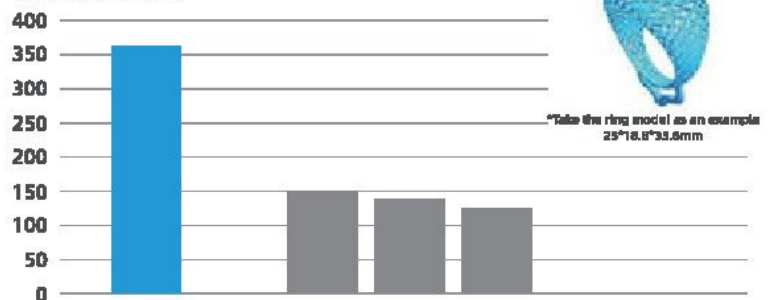

WaxJet 400
MJP
Annual estimated output
131400 (pcs/device)

Current Industry Level
MJP/DLP/SLA
Annual estimated output
47000-54000 (pcs/device)

